



Deutsche WindGuard Wind Tunnel Services GmbH

IECRE and MEASNET approved test laboratory



accredited by the / akkreditiert durch die

Deutsche Akkreditierungsstelle GmbH

as calibration laboratory in the / als Kalibrierlaboratorium im

Deutschen Kalibrierdienst



Calibration certificate

Kalibrierschein



DAkkS
Deutsche
Akkreditierungsstelle
D-K-15140-01-00

Calibration mark
Kalibrierzeichen

1721109
D-K-
15140-01-00
04/2017

Object
Gegenstand

Combined Wind Sensor

This calibration certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI).

Manufacturer
Hersteller

BARANI DESIGN, s.r.o.
Slovakia

The DAkkS is signatory to the multilateral agreements of the European co-operation for Accreditation (EA) and of the International Laboratory Accreditation Cooperation (ILAC) for the mutual recognition of calibration certificates. The user is obliged to have the object recalibrated at appropriate intervals.

Type
Typ

Elliptic Anemometer 3 / MeteoWind
2

Dieser Kalibrierschein dokumentiert die Rückführung auf nationale Normale zur Darstellung der Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI).

Serial number
Fabrikat/Serien-Nr.

-

Die DAkkS ist Unterzeichner der multilateralen Übereinkommen der European co-operation for Accreditation (EA) und der International Laboratory Accreditation Cooperation (ILAC) zur gegenseitigen Anerkennung der Kalibrierscheine.

Customer
Auftraggeber

BARANI DESIGN, s.r.o.
Slovakia

Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

Order No.
Auftragsnummer

Email 2017-03-29, Jeneiova

Project No.
Projektnummer

VT170471

Number of pages
Anzahl der Seiten

4

Date of Calibration
Datum der Kalibrierung

25.04.2017

This calibration certificate may not be reproduced other than in full except with the permission of both the German Accreditation Body and the issuing laboratory. Calibration certificates without signature are not valid. This calibration certificate has been generated electronically.

Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Auszüge oder Änderungen bedürfen der Genehmigung sowohl der Deutschen Akkreditierungsstelle als auch des ausstellenden Kalibrierlaboratoriums. Kalibrierscheine ohne Unterschrift haben keine Gültigkeit. Dieser Kalibrierschein wurde elektronisch erzeugt.

Date
Datum

23.06.2017

Head of the calibration laboratory
Leiter des Kalibrierlaboratoriums

Dipl. Phys. Dieter Westermann

Person in charge
Bearbeiter

Heiko Westermann, B. Sc.

1721109
D-K-
15140-01-00
04/2017

Calibration object <i>Kalibiergegenstand</i>	Combined Wind Sensor										
Calibration procedure <i>Kalibrierverfahren</i>	<ul style="list-style-type: none"> • Deutsche WindGuard Wind Tunnel Services: QM-KL-AK-VA <p>Based on following standards:</p> <ul style="list-style-type: none"> • MEASNET: Anemometer calibration procedure • IEC 61400-12-1: Power performance measurements of electricity producing wind turbines • IEC 61400-12-2: Power performance of electricity producing wind turbines based on nacelle anemometry • ISO 3966: Measurement of fluid in closed conduits • ISO 16622: Meteorology - Sonic anemometers/thermometers 										
Place of calibration <i>Ort der Kalibrierung</i>	Windtunnel of Deutsche WindGuard WindTunnel Services GmbH, Varel										
Test conditions <i>Messbedingungen</i>	<table border="0"> <tr> <td>wind tunnel area</td> <td>10000 cm²</td> </tr> <tr> <td>anemometer frontal area</td> <td>200 cm²</td> </tr> <tr> <td>diameter of mounting pipe</td> <td>34 mm</td> </tr> <tr> <td>blockage ratio ¹⁾</td> <td>0.020 [-]</td> </tr> <tr> <td>software version</td> <td>7.7</td> </tr> </table>	wind tunnel area	10000 cm ²	anemometer frontal area	200 cm ²	diameter of mounting pipe	34 mm	blockage ratio ¹⁾	0.020 [-]	software version	7.7
wind tunnel area	10000 cm ²										
anemometer frontal area	200 cm ²										
diameter of mounting pipe	34 mm										
blockage ratio ¹⁾	0.020 [-]										
software version	7.7										
	¹⁾ Due to the special construction of the test section no blockage correction is necessary.										
Ambient conditions <i>Umgebungsbedingungen</i>	<table border="0"> <tr> <td>air temperature</td> <td>25.2 °C ± 0.1 °C</td> </tr> <tr> <td>air pressure</td> <td>1006.7 hPa ± 0.3 hPa</td> </tr> <tr> <td>relative air humidity</td> <td>28.0 % ± 2.0 %</td> </tr> </table>	air temperature	25.2 °C ± 0.1 °C	air pressure	1006.7 hPa ± 0.3 hPa	relative air humidity	28.0 % ± 2.0 %				
air temperature	25.2 °C ± 0.1 °C										
air pressure	1006.7 hPa ± 0.3 hPa										
relative air humidity	28.0 % ± 2.0 %										
Measurement uncertainty <i>Messunsicherheit</i>	<p>The expanded uncertainty assigned to the measurement results is obtained by multiplying the standard uncertainty by the coverage factor k = 2. It has been determined in accordance with DAkkS-DKD-3. The value of the measurand lies within the assigned range of values with a probability of 95%.</p> <p>The reference flow speed measurement is traceable to the German NMI (Physikalisch-Technische Bundesanstalt) standard for flow speed. It is realized by using a PTB owned and calibrated Laser Doppler Anemometer (Standard Uncertainty 0.2 %, k=2)</p>										
Additional remarks <i>Zusätzliche Anmerkungen</i>	Revision 1.0 (replaces certificate dated 08.06.2017)										

Calibration result
Kalibrierergebnis

Sensor out Hz / 2	Tunnel Speed m/s	Uncertainty (k=2) m/s
4.227	3.926	0.050
6.461	5.896	0.051
8.631	7.814	0.050
10.905	9.803	0.051
13.323	11.888	0.052
15.686	13.894	0.052
17.806	15.763	0.052
16.812	14.881	0.052
14.458	12.853	0.051
12.144	10.861	0.051
9.754	8.815	0.051
7.543	6.870	0.050
5.239	4.857	0.050

File: 1721109

Statistical analysis	Slope	0.86825 (m/s)/(Hz/2) \pm 0.00170 (m/s)/(Hz/2)
	Offset	0.3054 m/s \pm 0.020 m/s
	Standard error (Y)	0.025 m/s
	Correlation coefficient	0.999979

Remarks
The calibrated sensor complies with the demanded linearity of MEASNET



1721109
D-K-
15140-01-00
04/2017

Graphical representation of the result
Grafische Darstellung des Ergebnisses

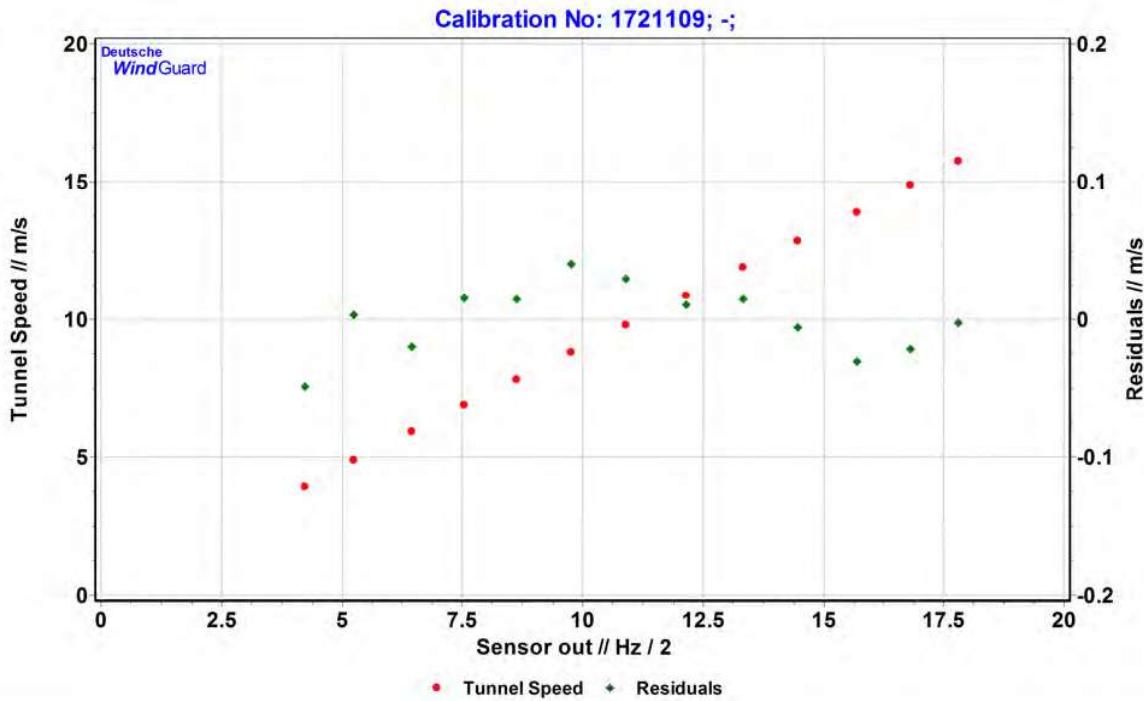


Photo of the measurement setup
Foto des Messaufbaus



Remark: The proportions of the set-up may not be true to scale due to imaging geometry.