

Safety

For your safety, the following general safety precautions must be observed during all phases of operation of this instrument.

CAUTION WARNING! THIS DEVICE MUST BE EARTHED

Do not use this equipment in a manner not specified by the manufacturer. The protective features of this product may be impaired. It could cause unavoidable damage to the equipment, personal injury and/or death.

Reviewing the complete documentation before installing or operating the instrument is important.

WARNING! HAZARDOUS VOLTAGES CAN CAUSE SHOCK, BURNS AND DEATH.

The power plug shall be disconnected from all voltage sources before it is opened for any adjustment, replacement, maintenance or repair.

Any adjustment, maintenance and repair of the opened instrument under voltage shall be avoided and, if unavoidable, shall be carried out only by a qualified person who is aware of the general device test practices.

All recommended equipments that should be earthed. Any interruption of the mains earth conductor inside or outside the instrument will make the instrument dangerous.

Do not install substitute parts or perform any unauthorized modification to the product.

Unless otherwise specified in the documentation, there are no user-serviceable parts inside this instrument.

Instruments that appear damaged or defective should be secured against unintended operation until they can be repaired by qualified service personnel.

This instrument is intended for use in dry, indoor locations only.

Do not wet the instrument when cleaning it.

Safety Symbols

These symbols, which have these meanings, may be marked on this instrument.



EARTH (GROUND) TERMINAL

Table of Contents

I. FEATURES & SPECIFICATIONS.....	4
1 Description.....	4
2 Features.....	4
3 Specifications.....	4
Electrical.....	4
Networking.....	5
Environmental Specifications.....	6
Mechanical Specifications.....	6
Antenna Port Specifications.....	6

II. OPERATION DESCRIPTIONS.....	7
1 Precise Time Synchronization.....	7
The IRIG-B Time Code Standard.....	7
Network Time Protocol / Simple Network Time Protocol.....	8
SNTP.....	8
NTP / SNTP in the EKOSync 1588.....	9
FREQ.....	9
ALARM RELAY.....	9
2 IEEE 1588 / PTP / C37.238.....	10
III. INSTALLATION.....	12
Device Hardware.....	12
Hardware Installation.....	14
IV. CONFIGURATION & SETTINGS.....	15
1 Front Panel Overview.....	15
2 Accessing the PTP/NTP TIME SERVER.....	18

EKOSync 1588 PTP TIME SERVER

I. FEATURES & SPECIFICATIONS

1 Description

EKOSync 1588 PTP Time Server provides sub-microsecond accuracy time information for synchronizing energy distribution subsystem intelligent electronic devices, and proceeding according to IEEE 1588 v2 time protocol. Product includes adjustable hold-over times for discontinuities with GPS communication, and compensation for antenna reception distortions.

2 Features

- DC IRIG-B (Unmodulated, DCLS - C37.118, not ready in this version)
- TCP/IP remote M&C management option
- Synchronized TOD (Time of Day) and PPS (Pulse per second) outputs
- User defined 10MHz/5MHz frequency output
- TCP/IP configuration option
- NTP/ SNTP (IEC 61850)
- SNMP v1, v2c & v3
- IEEE 1588 PTP Server
- 18-75V DC Isolated power supply
- Password protection and user authentication

3 Specifications

Electrical:

Input

Power Supply

Voltage: **18 to 75 V DC**

Power consumption: **10W max**

Ethernet (RJ45 UTP) **10/100Mbps**

Isolation

Power to GPS input **3 kV**

Power to I/O **3 kV**

Outputs

Relay output **250V 150mA**

4 TTL outputs **Time codes or pulses or user defined**

Electrical specification:

TTL/CMOS compatible 0-5 V, 150 mA

sink/source

Timing accuracy: ≤50 ns to UTC

Networking:

GENERAL

DHCP: **Auto-configuration with fall back to ARP tested link-local address**

VLAN: **Packet tagging**

PTP (IEEE 1588 V2)

General: **One-step or two-step operation
End-to-end or peer-to-peer delay calculations
Layer 2 (Ethernet) or Layer 3 (UDP) transport
Slave only mode
Default Profile support**

Power Profile support: **C37.238**

TLV support: **C37.238 offset from TAI time base used by PTP**

Alternate Time Offset TLV support: **with automatic or manual offset**

SNMP MIB support: **C37.238**

NTP

General: **Stratum-1 NTP & SNTP time server
Multicast & Broadcast server capability
Optional MD5 authentication**

SNMP

General: **V1, V2C, and V3 support, independently enabled
Configurable V1 and V2C community names and security groups
Fully configurable via SNMP
V3 User-based Security Module (USM) support
USM MIB support**

USM authentication methods: **MD5, SHA**

USM privacy methods: **DES, AES**

NOTIFICATIONS

General:

**SNMP trap generation V1, V2C, and V3
SNMPv3 traps authenticated and privatized
via USM
Syslog (RFC-3164 and 5424 verities)**

Environmental Specifications:

Operating and Storage conditions

Operating Temperature	-20° to 60°C (-4 to 140°F) according to UL 60950 -20° to 70°C (-4 to 158°F) according to IEC 60065
Storage Temperature	-20° to 70°C (-4 to 158°F)
Operating Ambient Humidity	3% to 97% (non-condensing conditions)
Altitude	3000m (9842 ft)

Mechanical Specifications:

Dimensions (H x W x D)	44 x 439 x 247,5 mm
Weight	3.920 kg

Antenna Port Specifications:

Voltage	3.3 VDC
Current	100 mA (max)
Impedance	50 Ω

II. OPERATION DESCRIPTIONS

1 Precise Time Synchronization

Precision Time Protocol (PTP), included in IEEE standard 1588 was originally designed to provide timing for critical industrial automation. PTP identifies two types of clocks, masters and slaves. A clock in a terminating device is known as an ordinary clock, a clock in a transmission component like an Ethernet Switch as a boundary clock. A master which is controlled ideally by a radio clock or a GPS receiver, synchronizes the slaves connected to it respectively.

PTP time server, namely GPS Clock, which provides synchronization in PTP (IEEE 1588) protocol on Ethernet network by using time from GNSS satellites utilizes existing data network so that an installation of a separate timing network is eliminated. Its 25ns accuracy and redundancy mechanisms are also advantages of new generation synchronization system.

Control, protection and measurement devices in modern electric grids need correct time for synchronous operation. To identify the sequence of events in case of unexpected outage, to manage the grid synchronously and to be able to make the measurements in the required accuracy a modern synchronization protocol is needed.

The IRIG-B Time Code Standard

IRIG-B is the industry standard for GPS time synchronization. The IRIG time codes were originally developed by the Inter-Range Instrumentation Group (IRIG), part of the Range Commanders Council (RCC) of the US Army. IRIG time code B is widely used in the electrical power industry. IRIG-B refers to a serial time code format. The IRIG-B time code consists of 100 bits produced every second, 74 bits of which contain various time, date, time changes and time quality information of the time signal. IRIG-B sends Day of Year, Hour, Minute and Second data on a 1KHz carrier, with an update rate of one second. IRIG-B DCLS (DC level shift) is IRIG-B without the 1KHz carrier.


There are three methods of communicating analogue pulses in the IRIG Standard:

- **Modulated** : amplitude-modulated, sine wave carrier
- **Unmodulated** :DC level shift, no carrier signal
- **Modified Manchester** : amplitude-modulated, square wave carrier

Three types of coded expressions are used in the IRIG standard:

- **Binary Coded Decimal** time-of-year (BCDTOY) and year (BCDYEAR)
- **Control Functions (CF)**, set of bits reserved for user applications
- **Straight Binary Seconds (SBS)** time-of-day (0 to 86400 seconds)

A comparison of IRIG-B coding methods is given in the figure below.

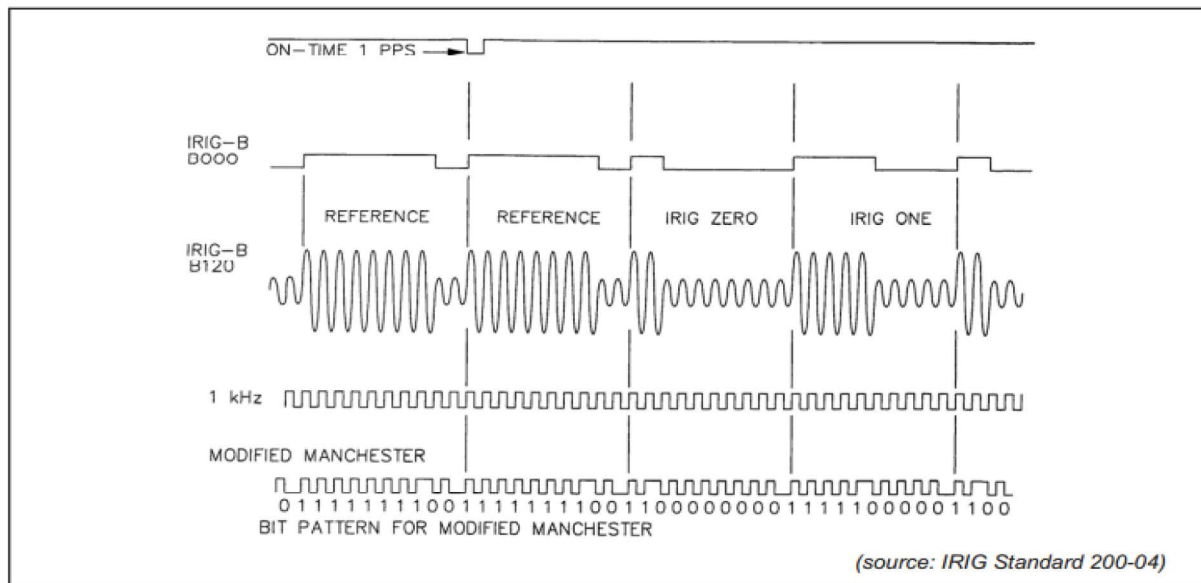

Network Time Protocol / Simple Network Time Protocol

Network Time Protocol (NTP) has been the traditional way to synchronization time over Ethernet networks. NTP allows time synchronization up to 100 milliseconds. The IEEE 1588 PTP is required to achieve tighter synchronization.

There is NTP led on front panel. When the NTP is enable, the led is ON. To enable the NTP server of the PTP/NTP Time Server check the Enable checkbox in the NTP configuration page.

PTP is basically a faster version of NTP. IEEE 1588 is designed for local systems requiring very high accuracies beyond those attainable using NTP, which is sufficient to transfer data across networks at speeds of up to 10 Mbps. As data rates have increased, the need for synchronised transmission and reception have increased with it. At speeds of 1 Gbps and above, PTP is necessary.

SNTP

A less complex implementation of NTP, using the same protocol but without requiring the storage of state over extended periods of time, is known as the Simple Network Time Protocol (SNTP). It is used in some embedded devices and in applications where high accuracy timing is not required.

NTP / SNTP in the EKOSync 1588

The EKOSync 1588 can act as an NTP or SNTP server, and is intended to be an NTP time server. The EKOSync 1588 synchronizes to GPS to provide accurate timing signals, and NTP time signals are published through the clock Ethernet port.

FREQ

The EKOSync 1588 has one Frequency out port which produces 5-10-20-25MHz.

ALARM RELAY

Connect the Sync indication relay to the alarm circuit if required.


(C = Common, NO = Normally Open, NC = Normally Closed)

Example;

The relay alarms when the antenna problems or poor sky view.

IEEE 1588 / PTP / C37.238

The IEEE 1588 precision time protocol (PTP) provides a standard method to synchronize devices with sub microsecond precision over a local area network (LAN) [6]. The protocol synchronizes slave clocks to a master clock ensuring that events and timestamps in all devices use the same time base. IEEE 1588 protocol uses the Best Master Clock algorithm to automatically determine which clock in the network is the most precise. It becomes the master clock that is a GPS disciplined time reference. All other clocks become slaves (e.g. a IEDs) and synchronize their clocks with the master. IEEE 1588 defines one-step and two-step clock operations. One-step clock updates accurate timestamp in synch message but two-step clock sends accurate timestamp in a follow up message. One step clock is recommended to use because this eliminates the need to read the transmit timestamp over MDIO and also eliminates the need to send a follow up message. Figure 1 shows an one step clock synchronization. The synchronization of the clocks is achieved using a series of message packets between master and slaves. There are three message types - Sync, Delay Request and Delay Response.

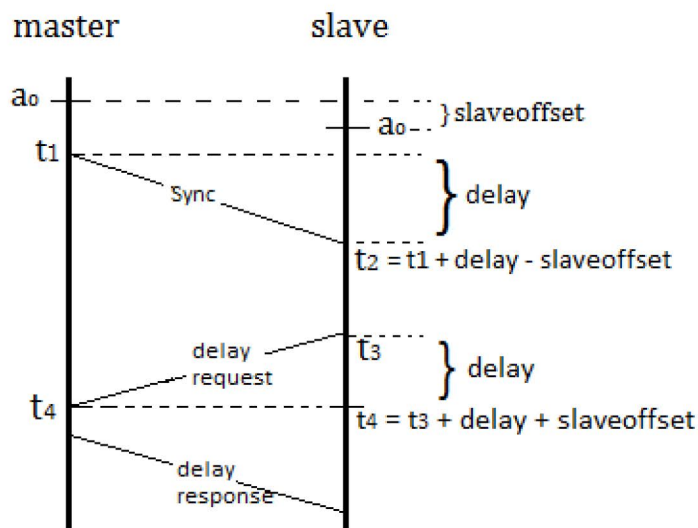


One-step clock synchronization

The master stamps the time (t_1) on the Sync message that leaves the master. The message arrives at slave clock at t_2 and sends a Delay-Req message at time (t_3) to the master, which is received by the master clock at a later time, t_4 . The master then sends a packet containing t_4 to the slave. The slave has all the information needed to calculate the slave offset. In this way the slave use this equations [$t_2 = t_1 + \text{delay} + \text{slaveoffset}$ (1) and $t_4 = t_3 + \text{delay} + \text{slaveoffset}$ (2)] to obtain following equation:

$$\text{Slaveoffset} = [(t_2 - t_1) - (t_3 - t_4)] / 2 \quad (3)$$

Now, using this equation the slave arranges its time clock. This equation (3) can be only used if the delays are equal to each other between t_1 to t_2 delay and t_3 to t_4 delay.

This measurement is repeated every second between the master clock and the slave clock and the synchronization accuracy can be reduced to approximately 100 ns.

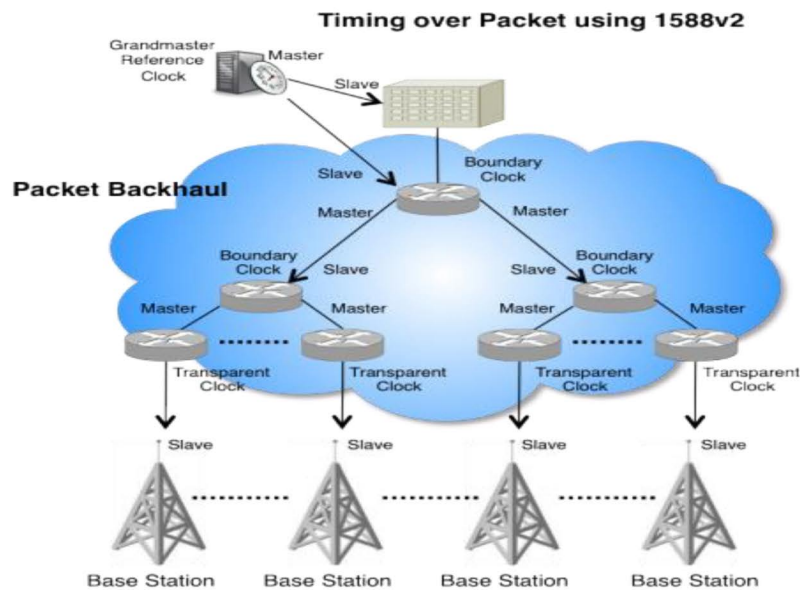

Grandmaster Clock

The root timing reference is called the grandmaster. The grandmaster transmits synchronization information to the clocks residing on its network segment. A grandmaster clock is the highest-ranking clock within its PTP subdomain and is the primary reference source for all other PTP elements. In a PTP network a grandmaster is the node that defines the correct time.

Ordinary Clock

An ordinary clock is a PTP clock with a single PTP port. It could be a master clock (grandmaster) or a slave clock. Ordinary clocks are the most common device within a PTP network.


Boundary Clock

A boundary clock is a device between PTP grandmaster and PTP slave clients. A boundary clock has multiple network connections and can act as a source (master) and a destination (slave or client) for synchronization messages. The boundary clock intercepts and processes all PTP messages and passes all other traffic.

Transparent Clocks

Transparent clocks measure and adjust for packet delay. The transparent clock computes the variable delay as the PTP packets pass through the switch. There are two types of transparent clocks, end-to-end and peer-to-peer. End-to-end transparent clocks update the time interval field for the delay associated. However peer-to-peer transparent clocks measure the line delay associated. Transparent clocks improve synchronization between the master and slave clocks and ensure that the master and slave clocks are not impacted by the effects of packet delay variation.

Mechanical Sizes

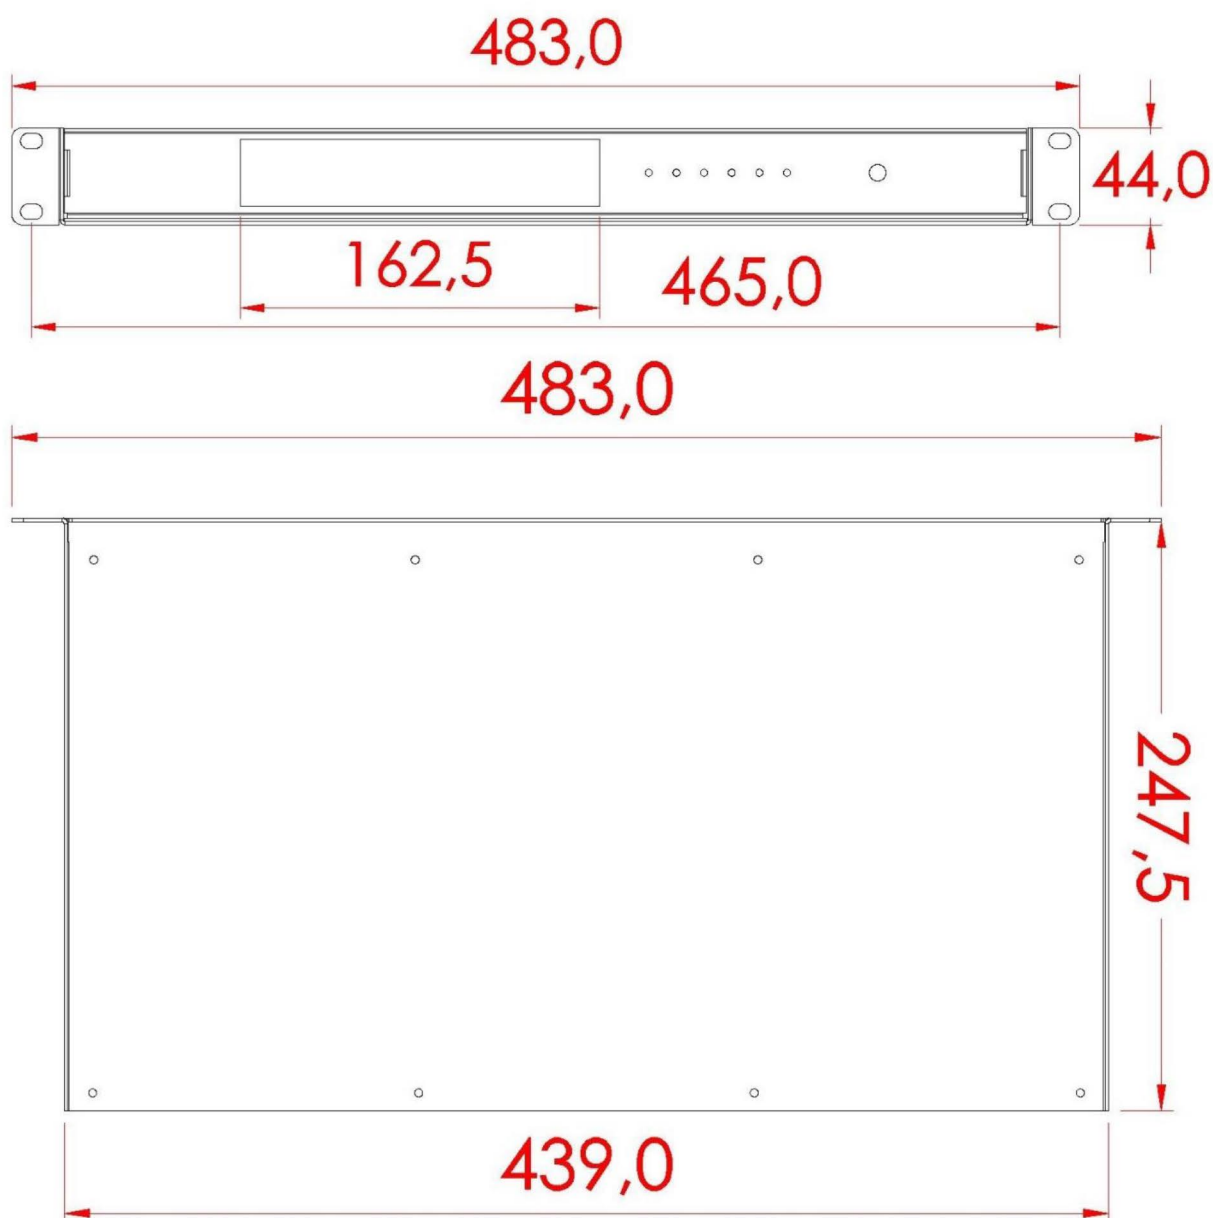

Hardware Installation

1. Install the antenna in a location with a clear sky view.
2. Install the EKOSync 1588 in the desired location and connect to the antenna.
3. Connect the EKOSync 1588 to the network switch.
4. Connect to power, ensuring the correct DC voltage (18 - 75VDC) is used.
5. Connect the Sync indication relay to the alarm circuit if required.
(C = Common, NO = Normally Open, NC = Normally Closed)
6. Once the EKOSync 1588 is installed and configured, connect the clock outputs to your devices.
 - An RG58 cable is recommended to connect devices to the output ports.
 - A termination resistor of 120 Ω can be added to the end of a TTL run to achieve good impedance matching.

IV. CONFIGURATION & SETTINGS

1 Front Panel Overview

This section explains use of the front panel.

LED Indicators

Front panel of the EKOSync 1588 contains six LEDs:

Label	Off	Flashing	On
PWR	Not powered	-	Powered
PTP	Disable		Enable
NTP	Disable		Enable
TP	Disable	Normal Operation	PTP Disable
SPD	10 Mbps	-	100 Mbps
LNK	Ethernet line not connected	Data Activity	Line OK

Menu Architecture

1 -LANGUAGE

- 1 -ENGLISH
- 2 -FRENCH
- 3 -TURKISH

Choose your language in this part.

2 -GPS CONFIG.

- 1 -QUALITY PARAMTRS
- 2 -BACK
- 3 -MAIN

3 -SYNC CONFIG.

- 1 -SYNCH1-SYNCH3 → 1 -PPS → 1 -PULSE PERIOD
 - 1- 1s
 - 2- 60s
 - 3- 3600s

2 –PULSE DURATION

- 1 -100 ms
- 2 -200 ms
- 3 -500 ms

3 –EDGE MODE

- 1 –RISING
- 2 –FALLING

4 –BACK

5 –MAIN

2 –FREQ → 1 -5 MHz

- 2 -10 MHz
- 3 -20 MHz
- 4 -25 MHz
- 5 -DISABLE

3 –IRIG-B → 1 –IRIG-B 003

- 2 –IRIG-B 002
- 3 –DISABLE

4–BACK

2 -SYNCH4

→ 1 –TOD PORT OPT. → 1 –BAUD RATE

- 1 -4800
- 2 -9600

2 –PARITY

3 –STOP BITS

4 –DATA BITS

5 –BACK

6 –MAIN

2 –PPS/TOD MODE

3 –ENABLE

4 –ASCII PROTOCOL → 1 –NMEA

- 2 –ASCII
- 3 –CM

5 -BACK

6 -MAIN

3 –SYNC MODE

4 -BACK

5 -MAIN

3 -LOCAL TIME OFFS.

Local time at various locations around the world are explained at the end of the pages.

1 –UTC

2 –LOCAL

→ 1 –MIT

2 –HST

3 –AST

4 –PST

5 –MST, PNT

6 –CST

14 –EAT

15 –MET

16 –NET

17 –PLT

18 –IST

19 –BST

- | | |
|-------------------|---------|
| 7 –EST, IET | 20 –VST |
| 8 –PRT | 21 –CTT |
| 9 –CNT | 22 –JST |
| 10 –AGT, BET | 23 –ACT |
| 11 –UTC, GMT, WET | 24 –AET |
| 12 –ECT | 25 –SST |
| 13 –EET, CAT, ART | 26 –NST |

5 –LAN CONFIG.

IP: 168. 1. 103
Enable Static IP
BACK
MAIN

6 –PRODUCT RELEASE

RELEASE

1 –R1. 0/1.0

7 –EXIT

Returns the main menu.


8 – RESET

Reset to Default

2 Accessing the PTP/NTP TIME SERVER


From a PC in your local area network open a Web browser window and configure with an IP address 192.168.0.1.103:7070. Also, you can assign an IP address within your local network.

When you write IP address on your web browser, you will see this picture in the bottom;

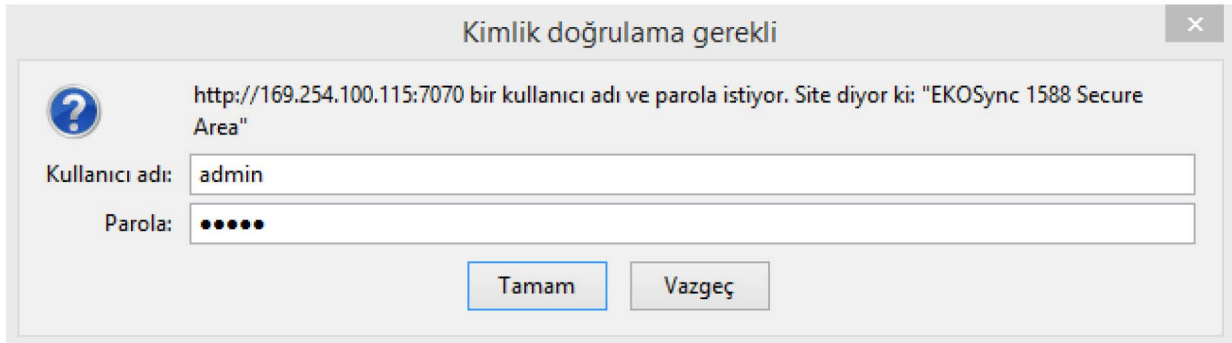


Kullanıcı Adı :	admin
Parola :	nimda

Once you access correctly, the following main screen will appear:

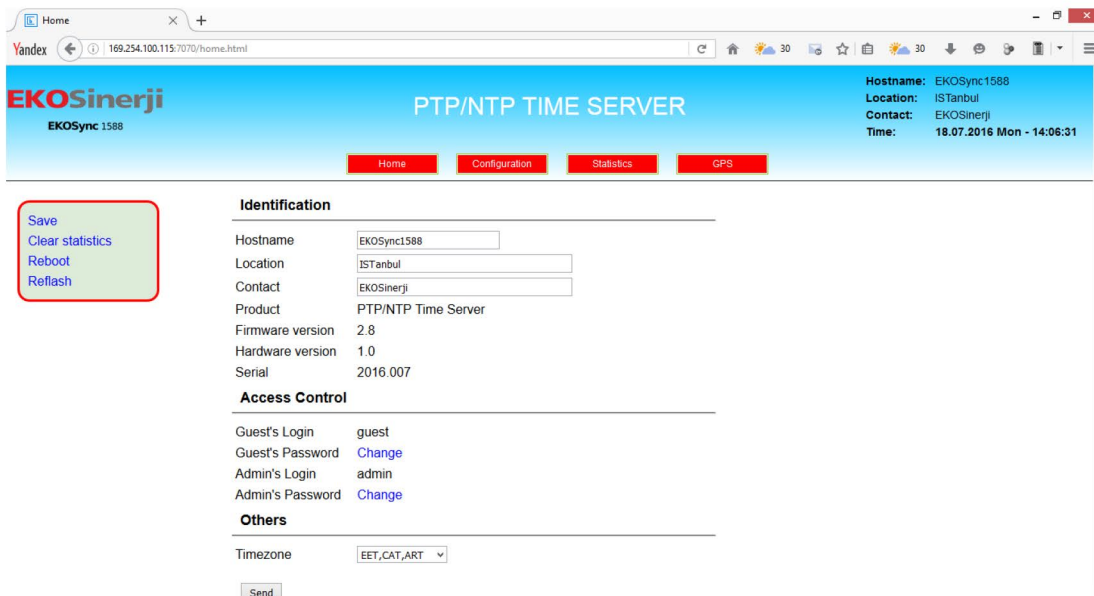

General Commands:



Save: This command saves the configuration changes to **TIME SERVER** flash memory, so they will be available next time the **TIME SERVER** reboots.


Clear statistics: Clear all of statistics.

Reboot: It restarts the **TIME SERVER**.

Reflash: This option allows a firmware upgrade in the **TIME SERVER**.

From **Home** button;

You see general informations about time server. These informations such as the hostname, location, contact and model of the **PTP/NTP Time Server** are provided. In addition; you can change your passwords.

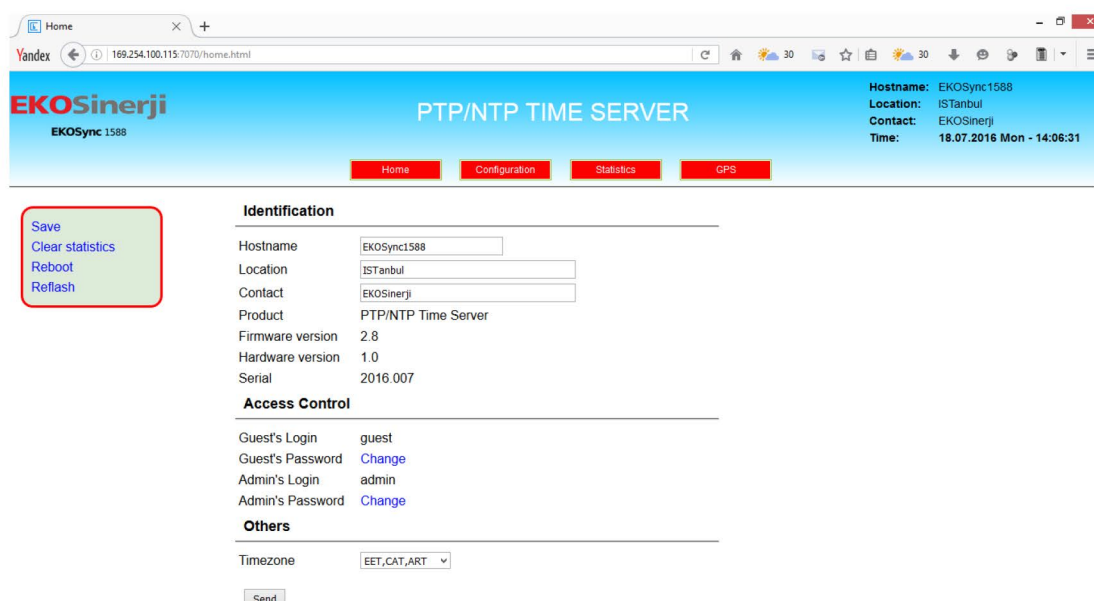

EKOSync 1588 PTP/NTP TIME SERVER

Hostname: EKOSync1588
Location: ISTanbul
Contact: EKOSinerji
Time: 18.07.2016 Mon - 14:06:31

Home Configuration Statistics GPS

Save
Clear statistics
Reboot
Reflash

Identification

Hostname: EKOSync1588
Location: ISTanbul
Contact: EKOSinerji
Product: PTP/NTP Time Server
Firmware version: 2.8
Hardware version: 1.0
Serial: 2016.007

Access Control

Guest's Login: guest
Guest's Password: [Change](#)
Admin's Login: admin
Admin's Password: [Change](#)


Others

Timezone: EET,CAT,ART
[Send](#)

From **Configuration** button;

In this menu you will be able to configure many parts as following;


- Administration: you can change http and https ports. Once configuration is complete, click the Send icon.

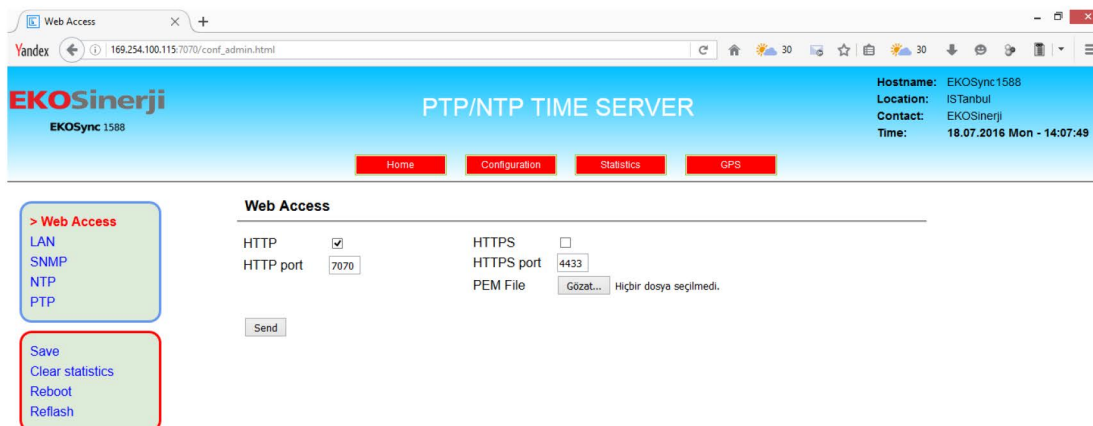

The screenshot shows the 'Web Access' configuration page of the EKOSync 1588 PTP/NTP TIME SERVER. The interface includes a navigation menu on the left with options: Web Access, LAN, SNMP, NTP, and PTP. The main content area is titled 'Web Access' and contains settings for HTTP and HTTPS. The HTTP section has a checked 'Enable' checkbox and a 'HTTP port' field set to 7070. The HTTPS section has an unchecked 'Enable' checkbox and an 'HTTPS port' field set to 4433. There is a 'PEM File' field with a 'Gözet...' button and a note 'Hiçbir dosya seçilmedi.'. A 'Send' button is at the bottom. The top right corner displays system information: Hostname: EKOSync1588, Location: ISTanbul, Contact: EKOSinerji, and Time: 18.07.2016 Mon - 14:07:49.

- LAN: For Static IP settings, check the **Enable** box in the LAN area. Also, you can change IP address manually. Once configuration is complete, click the Send icon.

If you change the IP address, you should write new IP address on your web browser. Then click the save tab, and press the **OK** button.

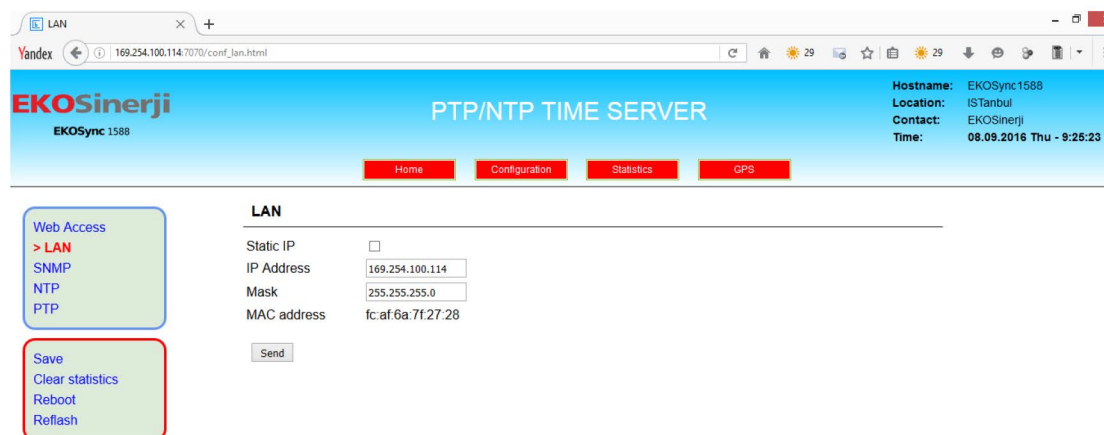

The screenshot shows the 'LAN' configuration page of the EKOSync 1588 PTP/NTP TIME SERVER. The navigation menu on the left is the same as the previous screenshot, but the 'LAN' option is selected. The main content area is titled 'LAN' and contains settings for Static IP. The 'Static IP' checkbox is checked. The 'IP Address' field is set to 169.254.100.114, the 'Mask' field is set to 255.255.255.0, and the 'MAC address' field is set to fc:af:6a:7f:27:28. A 'Send' button is at the bottom. The top right corner displays system information: Hostname: EKOSync1588, Location: ISTanbul, Contact: EKOSinerji, and Time: 08.09.2016 Thu - 9:25:23.


- SNMP:

SNMP agent is enabled by ticking the Enable checkbox. Once SNMP agent is up and running, the user needs to activate traps notifications by ticking Traps Enable.

Community “*public*” will only have read access to **TIME SERVER**

MIB variables, community “*private*” will have read and write access to **TIME SERVER** MIB variables. Define the type of **Access**: *ro* (read only) or *rw* (read and write). Press **Send** icon.


Enter the **IP address** of the host where the **TIME SERVER** will send the traps. Enter the destination **Port** for the traps. By default is *162*. Press **Send** icon.

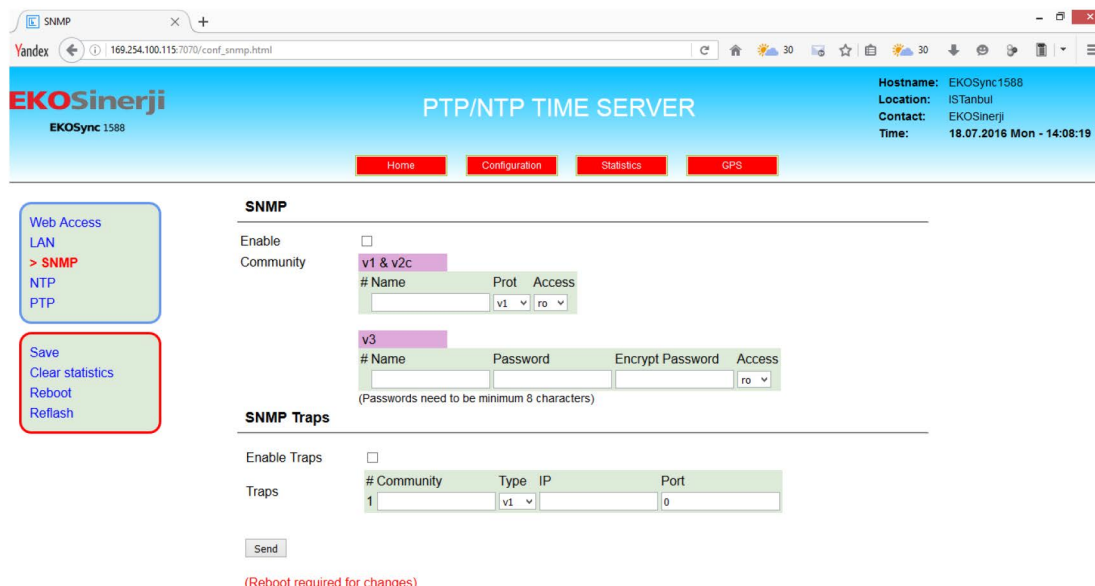

The screenshot shows the 'SNMP' configuration page. The top header includes the EKOSync 1588 logo, 'PTP/NTP TIME SERVER' title, and system status (Hostname: EKOSync1588, Location: ISTanbul, Contact: EKOSinerji, Time: 18.07.2016 Mon - 14:08:19). Navigation tabs are Home, Configuration, Statistics, and GPS. A sidebar on the left contains 'Web Access' (LAN, > SNMP, NTP, PTP) and 'Save' (Save, Clear statistics, Reboot, Reflash) buttons. The main content area has two sections: 'SNMP' and 'SNMP Traps'. The 'SNMP' section includes an 'Enable' checkbox, a 'Community' table with columns '# Name', 'Prot', and 'Access', and a 'v3' section with columns '# Name', 'Password', 'Encrypt Password', and 'Access'. The 'SNMP Traps' section includes an 'Enable Traps' checkbox and a 'Traps' table with columns '# Community', 'Type', 'IP', and 'Port'. A 'Send' button is at the bottom, with a note '(Reboot required for changes)'.

■ NTP:


Click the **NTP** tab, and check **Enable** if not already checked. Also, you can change NTP mode which choose one Unicast, Many cast, Broadcast or Mixed.

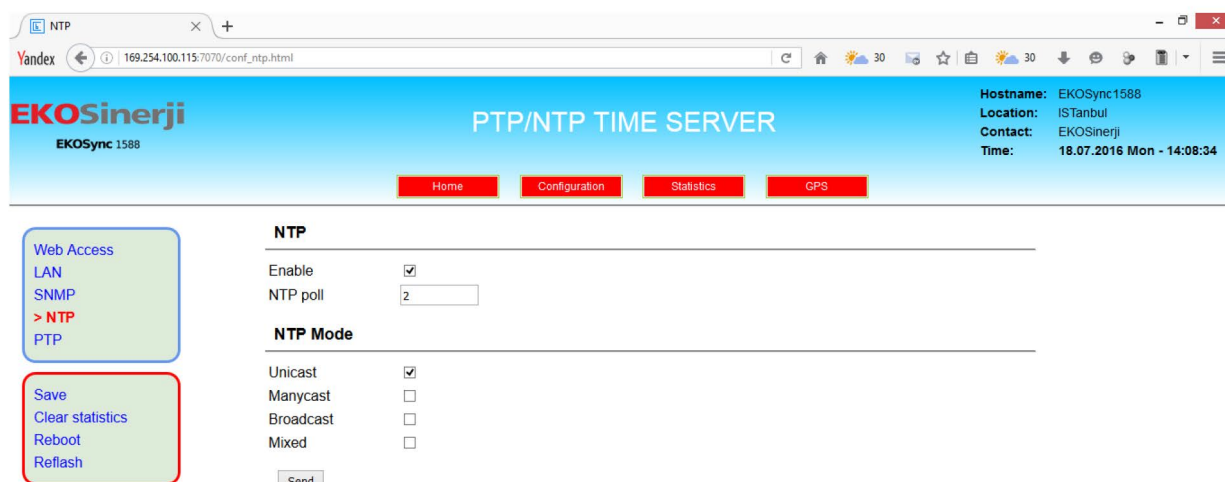

The screenshot shows the 'NTP' configuration page. The top header is identical to the SNMP page. The sidebar is also identical. The main content area has an 'NTP' section with an 'Enable' checkbox and an 'NTP poll' input field. Below this is an 'NTP Mode' section with checkboxes for 'Unicast', 'Multicast', 'Broadcast', and 'Mixed'. A 'Send' button is at the bottom.

▪ PTP:

Click the **PTP** tab. Check **Enable**, if not already checked. 1588 accounts for the variable delay to packets from Ethernet switches that inhibits path delay measurements, and allows accuracy down to the nanosecond level at end-device clocks.

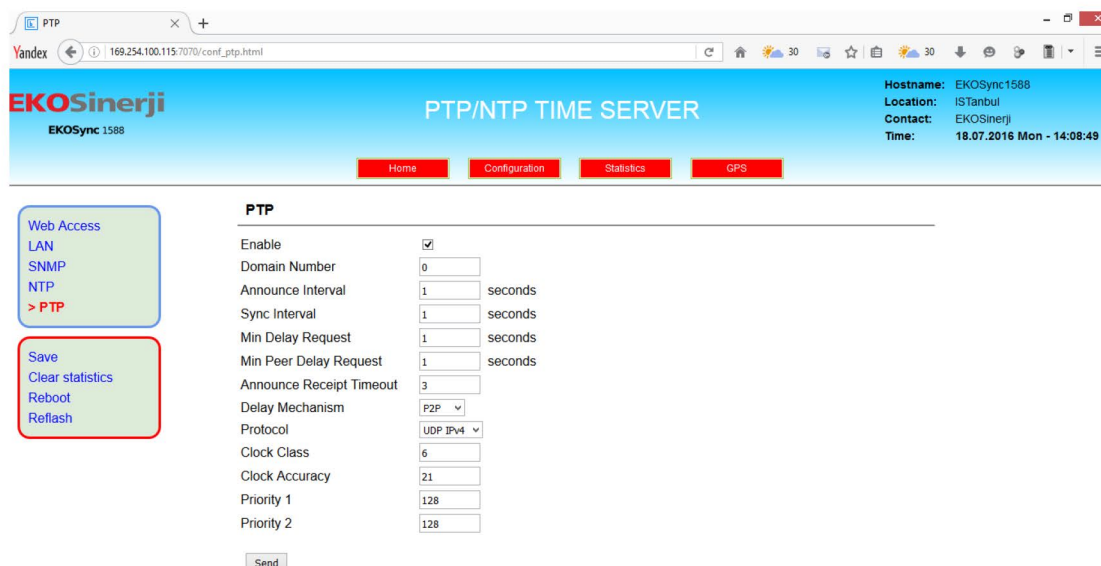


PTP

Enable	<input checked="" type="checkbox"/>
Domain Number	<input type="text" value="0"/>
Announce Interval	<input type="text" value="1"/> seconds
Sync Interval	<input type="text" value="1"/> seconds
Min Delay Request	<input type="text" value="1"/> seconds
Min Peer Delay Request	<input type="text" value="1"/> seconds
Announce Receipt Timeout	<input type="text" value="3"/>
Delay Mechanism	<input type="text" value="P2P"/>
Protocol	<input type="text" value="UDP IPv4"/>
Clock Class	<input type="text" value="6"/>
Clock Accuracy	<input type="text" value="21"/>
Priority 1	<input type="text" value="128"/>
Priority 2	<input type="text" value="128"/>

From **Statistics** button:

General statistics on the **NTP/PTP TIME SERVER** will appear, such as:

- **Uptime**: Running time of the **TIME SERVER**, from the last time of turning on.
- **Time (UTC)**: Date and time indication in UTC format.
- **Time (Local)**: Date and time indication according to the selected time zone.

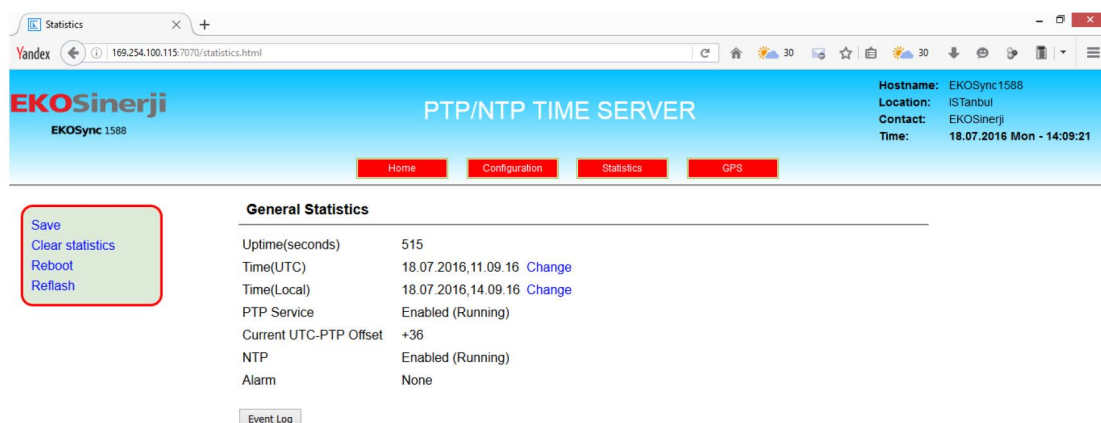


General Statistics

Uptime(seconds)	515
Time(UTC)	18.07.2016,11.09.16 Change
Time(Local)	18.07.2016,14.09.16 Change
PTP Service	Enabled (Running)
Current UTC-PTP Offset	+36
NTP	Enabled (Running)
Alarm	None

From **GPS** button:

In this menu the following can be viewed:

- Satellite Signal Reception
- Location
- Antenna Status
- Mask Angle
- Low Satellites
- Cable Delay

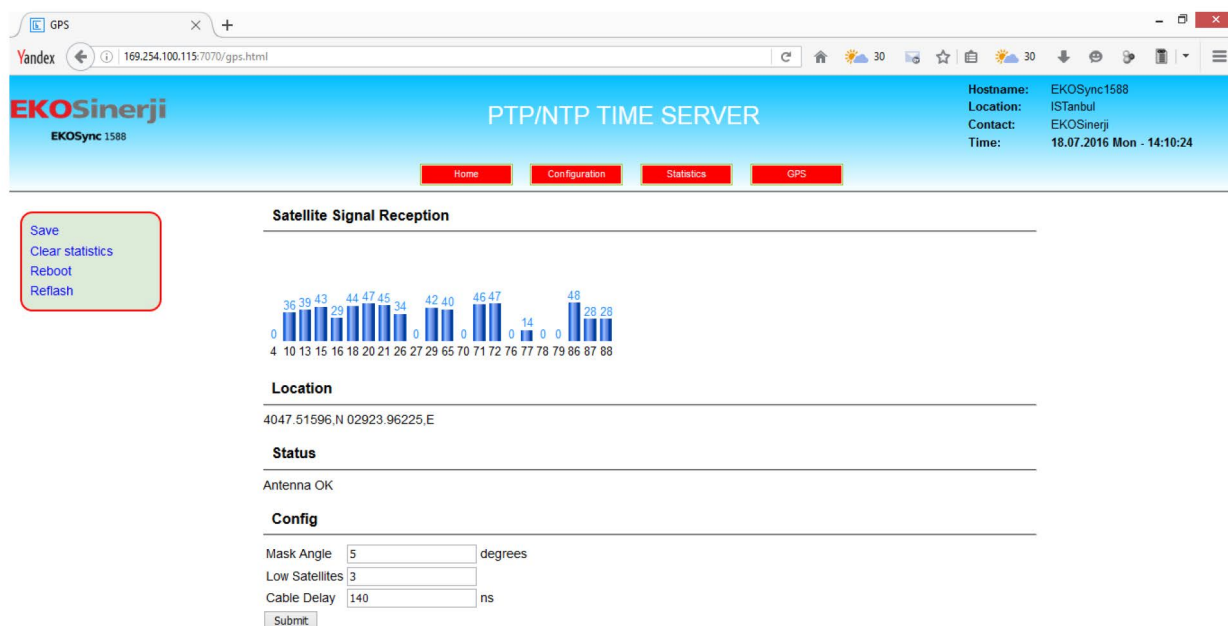

List of UTC offsets

Offset	Abbreviation	Description
-11	MIT	Samoa
-10	HST	Hawaii
-9	AST	Alaska
-8	PST	Pacific Standard Time
-7	MST,PNT	Mountain Standard Time
-6	CST	Central Standard Time
-5	EST,IET	Eastern Standard Time
-4	PRT	Atlantic Standard Time
-3.5	CNT	Newfoundland
-3	AGT,BET	Eastern South America
0	UTC,GMT,WET	Coordinated Universal Time
+1	ECT	European Central Time
+2	EET,CAT,ART	European Eastern Time
+3	EAT	Saudi Arabia
+3.5	MET	Iran
+4	NET	
+5	PLT	West Asia
+5.5	IST	India
+6	BST	Central Asia
+7	VST	Bangkok
+8	CTT	China
+9	JST	Japan
+9.5	ACT	Central Australia
+10	AET	Eastern Australia
+11	SST	Central Pacific
+12	NST	New Zealand