

PM180

UNIVERSAL IED AND CONTROLLER



SATEC eXpertMeter PM180 is a high performance analyzer that allows versatile uses. The high performance of the eXpertMeter, together with the unique flexible design of the expansion cards, enables its use in large variety of applications, in which it can substitute several other devices which saves costs, space and complexity.

Examples of Applications

- IED with IEC 61850 protocol
- Substation and industrial automation controller
- High accuracy power quality analyzer (PQA)
- Check meter
- Fault recorder
- Protection relay
- Sequence of Events (SoE)

Features

Each function of the PM180 uses cutting edge technologies to provide maximum performance and flexibility while keeping it cost-effective:

Various Measurement and Protection Channels

- 4 voltages (4th voltage AC/DC), 4 currents
- Optional additional 4 or 8 current channels for fault analysis
- Transient recording (option) of 2kV at 1024 samples per cycle (16/20μS at 60/50Hz)
- Digital fault recorder option – up to 50/100A current

Measurement to the Highest Available Standards

- Power measurements– IEC 61000-4-30 Class A
- Energy measurements – IEC 62052-22 Class 0.2S / 0.05%
- Power Quality Analysis – EN 50160, IEEE 1159, GOST R 54149-2010

Fault Protection and Data Recording

- 256 MB on board memory
- 4 Simultaneous waveform loggers
- Pre- and post-fault waveform logging
- Standard and programmable thresholds

Multiple Communication Ports and Protocols

- Standard communication: Ethernet, USB, RS-232/422/485
- Optional communication: IR, front USB, 2G/3G Modem, Fiber Optic Ethernet, Dialup Modem, Profibus and WiFi
- Standard protocols: Modbus RTU, ASCII, Modbus/TCP, DNP 3.0, DNP3/TCP
- Optional protocols: IEC 61850, MMS and GOOSE Messaging, Profibus




Advanced Automation and Control Capabilities

- Up to 48 digital inputs
- Up to 24 relay outputs
- Up to 12 analog I/O
- 1ms sampling rate
- Comprehensive programming logic
- Accurate time synchronization (SNTP, DI, IRIG-B)

Robust Construction and Design

- 3 hot-swap expansion cards
- Optional redundant power supply and Ethernet port
- Compact half 19" 3U high


Mechanical size

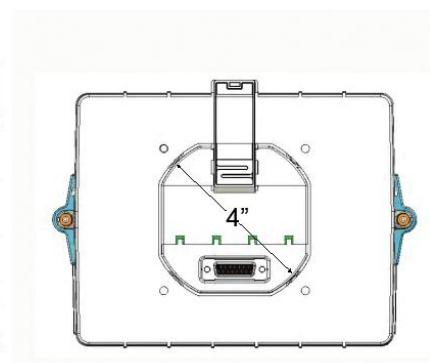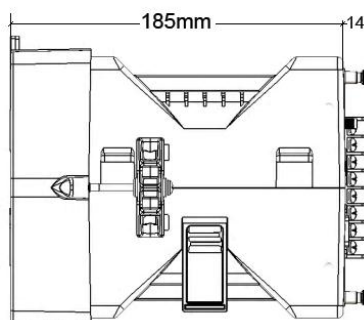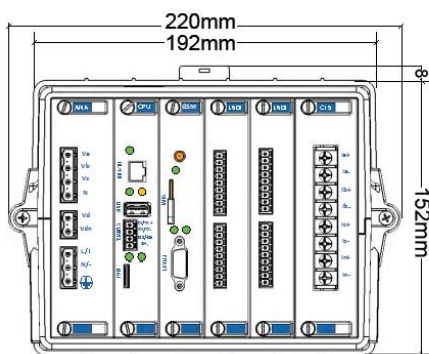


PM180 Screen Shots




3-Phase

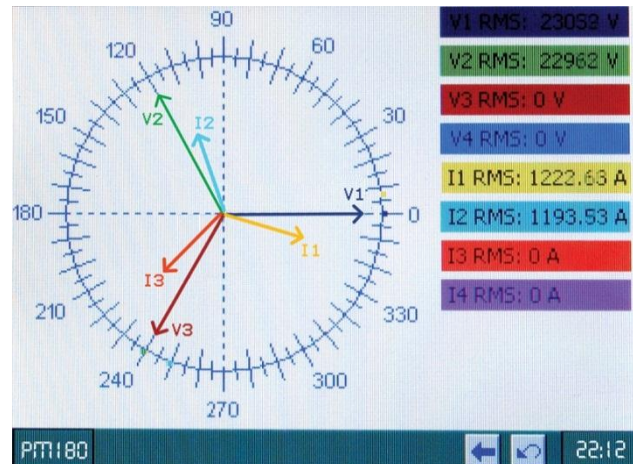

Phasor

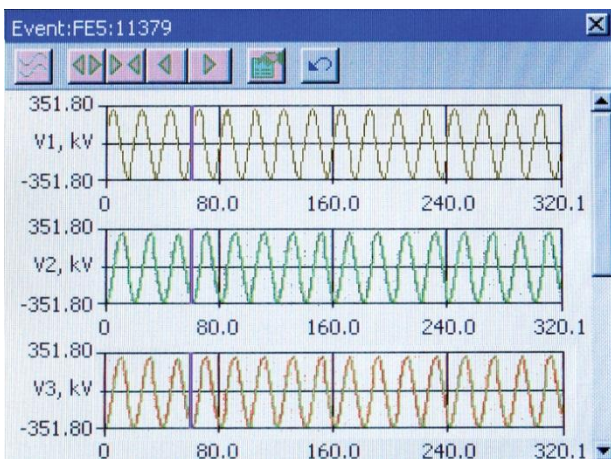

Event

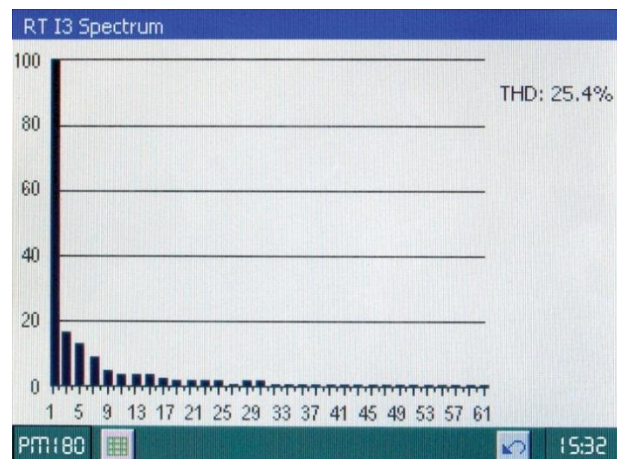

Spectrum

Order String

MODELS

6 in 1 device for Substation and industrial automation:
 1- Precise Energy/Revenue meter (IEC 62053 Class 0.2S)
 2- Advanced Power Quality Analyzer (IEC 61000-4-30)
 3- Fault recorder
 4- Sequence Of Event
 5- Bay Controller capabilities
 6- Transient Recorder (optional)

PM180

PM180 with 5.7" touchscreen graphic color display

PM180-TFT

PM180 with 3 line LED display

PM180-LED

PM180 with 12 window LED display

PM180-LD12

OPTIONS

Voltage Inputs

690V AC Nominal Voltage Input

-

120V AC Nominal Voltage Input

U

Current Inputs

5 Ampere

5

1 Ampere

1

100A Split Core HACS (Calibrated to 5A)

CS1S

Frequency

50 HZ

50Hz

60 HZ

60Hz

Accuracy and Power Quality standard

ANSI C12.20 - USA Standard IEEE1159 Full Power Quality

A

IEC 62053-22 - European Standard EN50160 Full Power Quality

E

GOST13109 - Russian Standard

G

Power Supply - MAIN

85-265V AC and 88-290V DC (Default)

ACDC

Communication Standard

IEC61850 (SISCO)

850

OPTIONAL PLUG-IN MODULES

PLUG-IN MODULES - Add Plug-In Modules

Maximum 3 modules

Digital Inputs (Max. 48 Digital Inputs)

DI 16 Dry Contacts

DI-DRC

DI 16 24V DC

DI-24V

DI 16 125V DC

DI-125V

DI 16 250V DC

DI-250V

Relay Outputs (Max. 24 Relay Outputs)

8 Relays

RLY-R8

Auxiliary POWER SUPPLY (Max. 1 modules per Instrument)

AUX. P.S. AC/DC

ACDC



Innovative Electronics For You

M. B. Control & Systems Pvt. Ltd.

Corporate Office

31/1, Ahiripukur Road, Kolkata 700019, West Bengal, India

Call : +91 98313 30473, 98312 06454 | Fax : +91 033 2287 0445

Email : enquiry@mbcontrol.com, service@mbcontrol.com (for service related queries only)

Website : www.mbcontrol.com